

INSTALLATION INSTRUCTIONS





IMPORTANT INFORMATION


To prepare for the installation of your Attica Face of Wall Hardware, read these instructions.

- Doors suited to internal applications only.
- Kits cater for single door installation only.
- 2 kits are required for double door installations.
- Maximum door weight 80kg.
- Follow these instructions to ensure safe operation of this product post installation.

These instructions should be read in conjunction with any applicable product installation instructions and the Door Care and Maintenance Guide

ITEMS REQUIRED

- 1 x Track Bar (2200mm W x 40mm H x 6mm D)
- 2 x Track Rollers
- 2 x Anti-Jump Pins (attached to Rollers)
- 5 x Rest Plates & fixings
- 5 x Wall Spacers
- 2 x Door Stops & fixings
- 2 x Track End Covers & fixings
- 2 x Soft Closer/Opener
- 1 x Floor Mounted Guide
- 1 x 5mm Allen Key
- 1 x 2.5mm Allen Key
- Timber & Masonry fixings

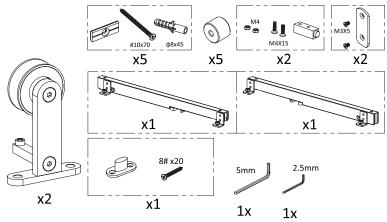



INSTALLATION INSTRUCTIONS

DOOR GUIDE OPTIONS

- The Face of Wall hardware kit includes a Floor Mounted Guide as standard.
- A Wall Mounted Guide is available for hard floors such as tile, concrete, stone or marble. This is sold separately.
- To accommodate the floor guide, doors will require a groove in the bottom rail measuring 15mm H x 7mm W.

DIMENSIONAL DETAIL


 Care must be taken to consider the ceiling cornice when planning the installation of the Face of Wall solution.



Floor Mounted Guide Standard kit inclusion



Wall Mounted Guide Sold separately

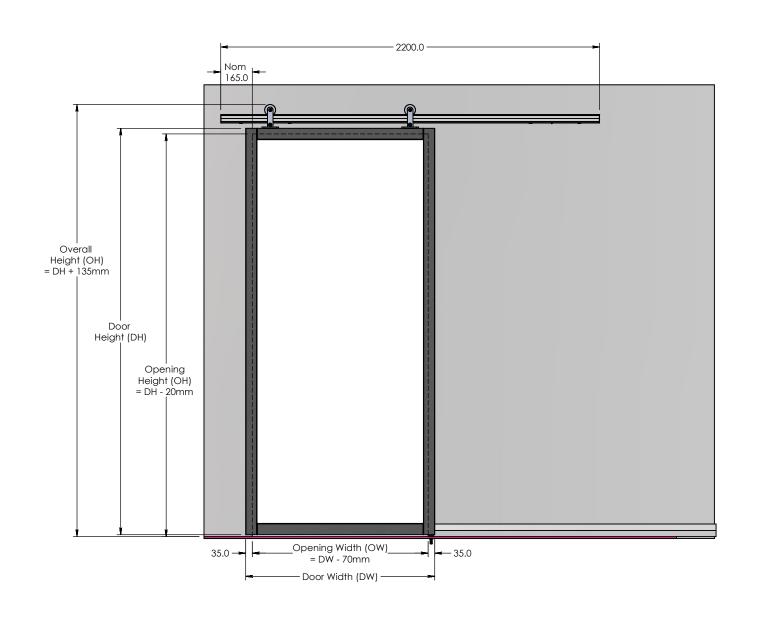



INSTALLATION INSTRUCTIONS


FIXING REQUIREMENTS


PLASTER WALL FIXING


- Where a timber stud cannot be located, a timber batten is used on plaster walls to provide sufficient surface strength to support the weight of track and door without compromising the wall surface.
- A timber batten is also used to provide support that aligns with the wall fixing points in the track (i.e. a plaster wall with timber frame not in alignment with the track fixing positions).


CONCRETE OR MASONRY WALL FIXING

Concrete or Masonry Wall structures require that all fixing points are securely anchored and can adequately support the weight of track and door without compromising the wall surface.

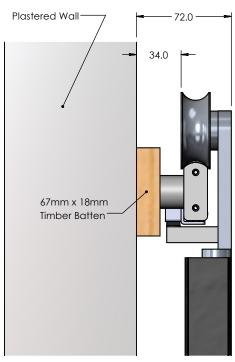



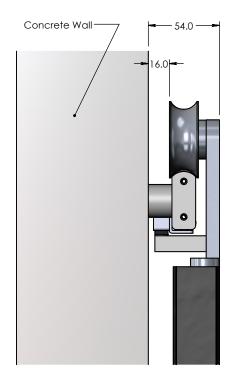


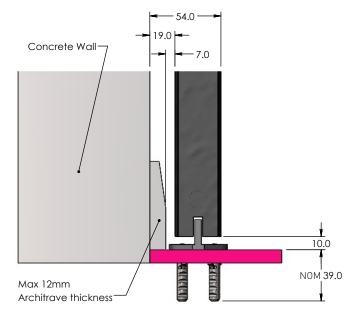






INSTALLATION INSTRUCTIONS



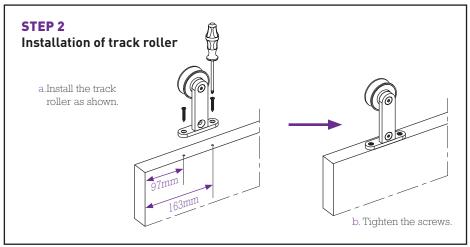




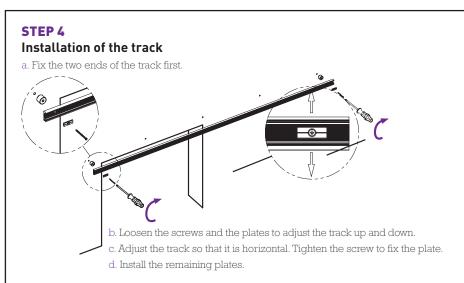


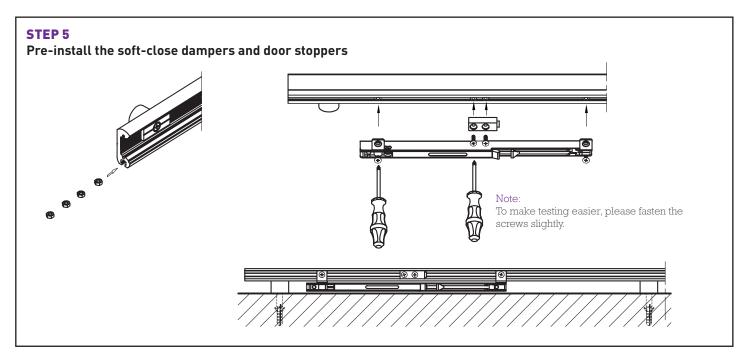




INSTALLATION INSTRUCTIONS

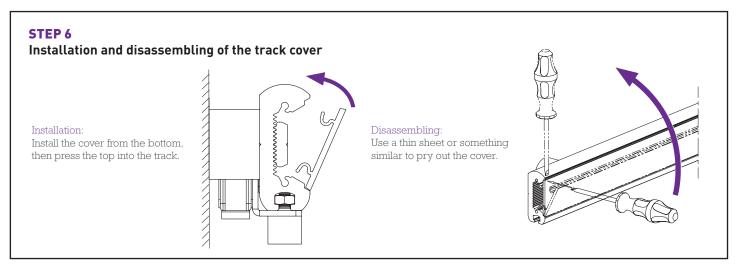


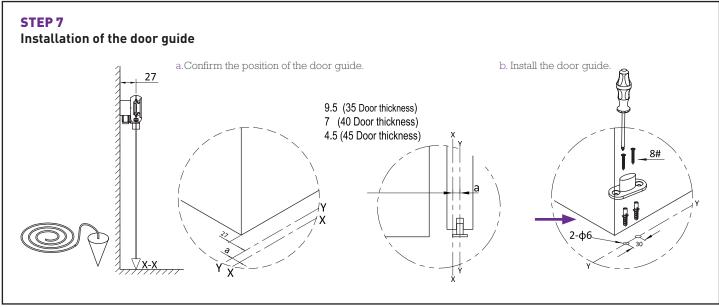


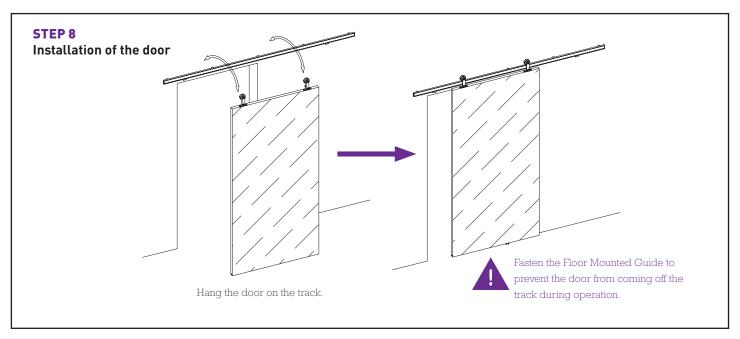




INSTALLATION INSTRUCTIONS

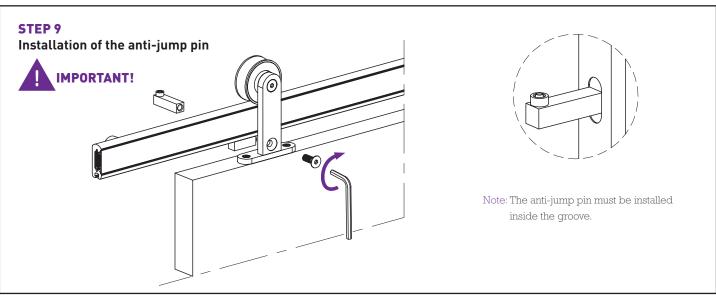

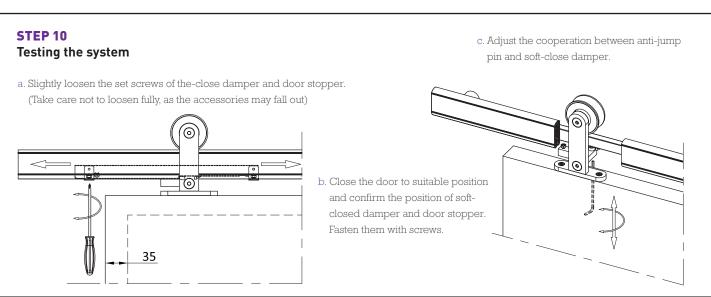

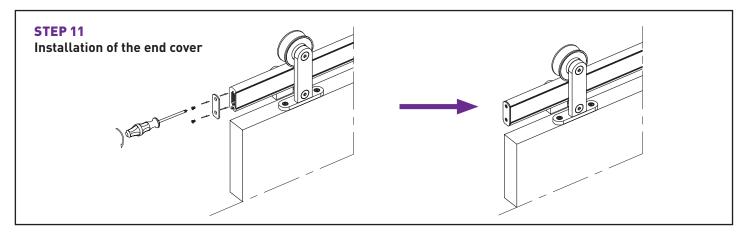

FAILURE TO ADHERE TO INSTALLATION INSTRUCTIONS WILL VOID WARRANTY. For full Terms and Condition of Warranty visit www.corinthian.com.au/about/warranty

Whilst the utmost care is taken to ensure the accuracy of the information contained herein, it is provided in the understanding that the company shall under no circumstances be liable for any injuries, expenses or other losses which may in any way be attributable to the use or adoption of such data and/or design details. All dimensions indicated are nominal only. Corinthian Doors reserves the right to alter or amend without prior notice data and design details specified herein. Photographs or illustrations may not exactly depict the design or specification and may vary to actual. Doors and products are supplied unfinished unless otherwise specified. www.corinthian.com.au CORCNAT0628/224.